

SkyLink915

Overview

SkyLink915 is an ISM Band (902-928 MHz) bidirectional dual radio system ideal for UAS Command and Control (C2). SkyLink915 implements the same interface as other SkyLink products, but without the need for FCC licensing or for FAA permission to transmit approvals. SkyLink915 provides a protocol agnostic autopilot telemetry interface for Command and Control (C2) data, and has built in system status monitoring to meet the requirements of RTCA DO-377A.



Features

- Dual radio architecture for path diversity.
- Frequency hopping design for frequency diversity and to mitigate ISM band interference.
- Integrated status, integrity, and health monitoring of both local (airborne) and remote (ground) radio systems to meet the requirements for the Data Transfer, Security, and Routing (DTSR) subsystem in RTCA DO-377A.
- Transparent, protocol agnostic, RS232 autopilot telemetry interface.
- UTC synchronized TDD message frame structure
- Connects to SkyStation915 and SkyStation915LTE ground radio systems.
- Seamless integration with muLTElink5060 multiple link airborne radio system.
- Supported by SkyLine Cloud Managed BVLOS Service.
- Environmental DO-160G
- Software DO-178C Level C
- Complex Hardware DO-254 Level C

Regulatory

• FCC 47 CFR Part 15.247 ID 2AFFTC2XISM

Technical Specifications

| Specification | Value |
|-------------------------|--------------------------|
| Input Voltage | 4 to 36 VDC |
| Power | Peak – 1.7 W |
| Size | 51 x 78 x 33 mm |
| Weight | 74 grams |
| Operating Temp | -45 to 70°C |
| Radio | |
| Band | ISM Band: 902 to 928 MHz |
| Transmit Power | 1 W (4W EIRP) |
| Receiver Sensitivity | -118 dBm |
| Bandwidth | 200 kHz |
| Data Transmission | |
| User Data Bits | 4400 Bytes/sec |
| Timing/Position Input | |
| UTC | 1 PPS Time Pulse |
| Position | NMEA 0183 115,200 bps |
| Interface | RS-232 |
| Environmental | |
| DO-160G | Temperature Cat B2 |
| Part Numbers | |
| SkyLink915 | UAV-1005579-001 |
| ISM Band Dipole Antenna | UAV-1004675-004 |
| truFYX EXT GPS | UAV-1004957-001 |
| truFYX INT EXP GPS | UAV-1002500-001 |
| George G3 Autopilot | UAV-1005526-001 |
| | · |


uAvionix reserves the right to alter product, services offerings, specifications, and pricing at any time without notice. © Copyright 2019 uAvionix, all rights reserved. <u>www.uavionix.com</u>

The following required statement from the Federal Communications Commission (FCC) applies to United States based entities with the exception of direct sales to the U.S. Government and units directly exported by uAvionix: This device has not been authorized as required by the rules of the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased, until authorization is obtained.





Mechanical Specifications

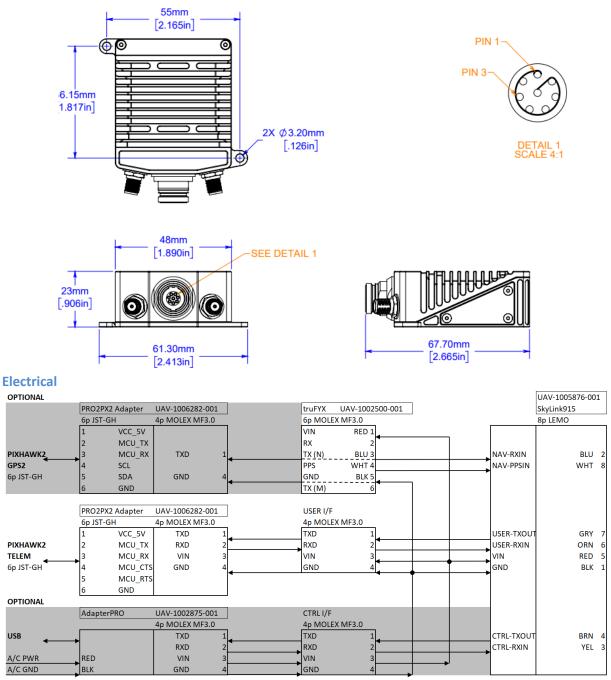

The following required statement from the Federal Communications Commission (FCC) applies to United States based entities with the exception of direct sales to the U.S. Government and units directly exported by uAvionix: This device has not been authorized as required by the rules of the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased, until authorization is obtained.

uAvionix reserves the right to alter product, services offerings, specifications, and pricing at any time without notice. © Copyright 2019 uAvionix, all rights reserved. <u>www.uavionix.com</u>