

## Overview


muLTElink is a multiple link airborne radio system that combines a DO-377A Link Executive Manager (LEM) with integrated LTE and C-Band command and control (C2) radios plus support for an external ISM C2 radio. muLTElink connects to an autopilot via a transparent RS232 serial interface. muLTElink is plug and play with the SkyLink915 ISM Band CNPC radio, and supports SATCOM/ethernet interface radios. It also streamlines platform integration by automatically registering aircraft with SkyLine Cloud Managed BVLOS service.

## Features

- Transmits and receives simultaneously on all available links, offering multi-band path diversity.
- Integrated airborne Link Executive Manager (LEM) that complies with DO-377A.
- Transparent, protocol agnostic, RS232 autopilot telemetry interface.
- Integrated Global LTE Cat 1 radio exclusively for Command Non-Payload Control (CNPC).
- Integrated SkyLink5060Micro C-Band airborne radio system (ARS).
- Optional external SkyLink915 ISM Band airborne radio system (ARS).
- Optional external SATCOM or DHCP WAN/LTE device.
- User accessible nano SIM card.
- Automatic aircraft registration with SkyLine Cloud Managed BVLOS Service.
- Ethernet reprogramming and ARS configuration interface
- Environmental DO-160G
- Software DO-178C Level C
- Complex Hardware DO-254 Level C

## Regulatory

- Skylink FCC 47 CFR Part 15.247  
ID: 2AFFTC2XCP0 (in progress)
- LTE FCC ID: XPYUBX21BE01



## Technical Specifications

Parameter	Value
Input Voltage / Power	9-31 VDC
Size	19 x 51 x 71 mm
Weight	100 grams
Operating Temp	-45 to 70°C
<b>C-Band Radio</b>	
Band	C-Band: 5030 to 5091 MHz
Transmit Power	100 mW
Receiver Sensitivity	-113.5 dBm
Bandwidth	210 kHz
Doppler Capture Range	±12.5 kHz
<b>LTE Radio</b>	
Service	Global LTE Cat 1
LTE FDD Bands	1, 2, 3, 4, 7, 8, 12, 13, 18, 19, 20, 26, 28
LTE TDD Bands	38, 39, 40, 41
SIM	Global IoT eSIM
<b>External Interfaces</b>	
<b>Timing/Position</b>	
Interface	RS-232 115200 bps
Position Protocol	NMEA 0183
UTC	1 PPS Time Pulse
<b>External CNPC User</b>	
Interface	RS-232 57600 bps
Protocol	Binary, Transparent
<b>External CNPC Control</b>	
Interface	RS-232 115200 bps
Protocol	UCP
<b>External Ethernet Radio</b>	
Interface	JST.GH
Protocol	Ethernet
<b>Autopilot Telemetry</b>	
Interface	RS-232 or TTL 57600 bps
Protocol	Binary, Transparent
<b>Environmental</b>	

The following required statement from the Federal Communications Commission (FCC) applies to United States based entities with the exception of direct sales to the U.S. Government and units directly exported by uAvionix: This device has not been authorized as required by the rules of the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased, until authorization is obtained.


uAvionix reserves the right to alter product, services offerings, specifications, and pricing at any time without notice.

© Copyright 2022 uAvionix, all rights reserved. [www.uavionix.com](http://www.uavionix.com)


DO-160G

Temperature Cat B2

## Mechanical Specification

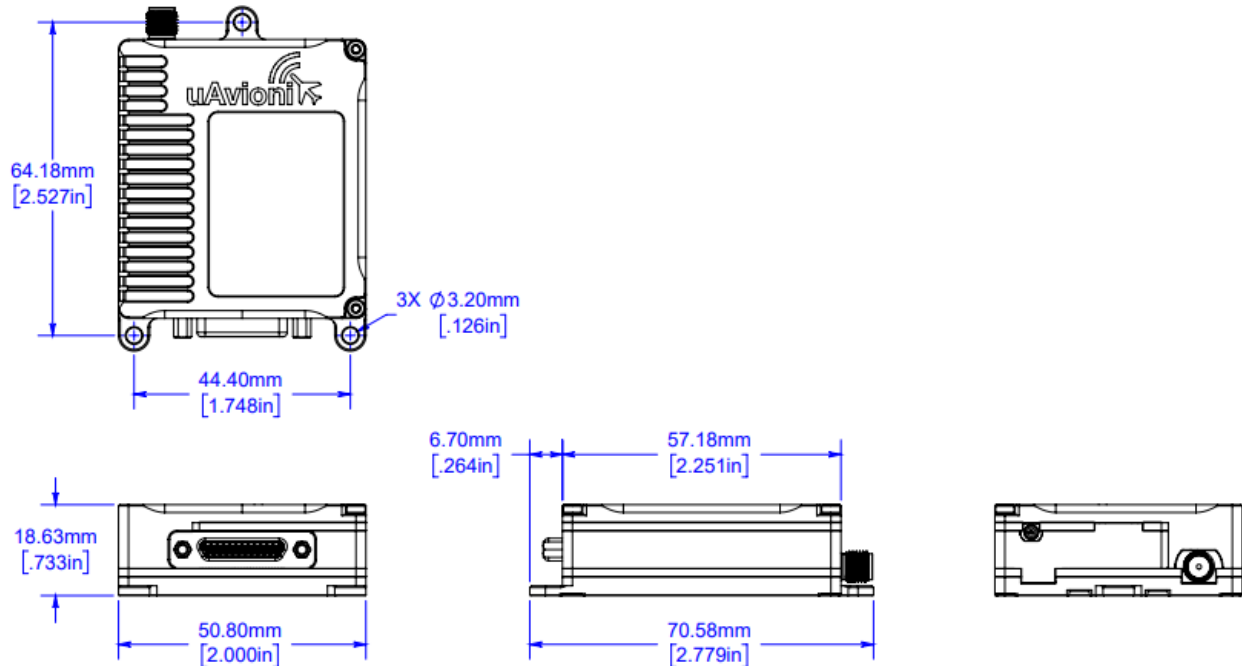

## Electrical

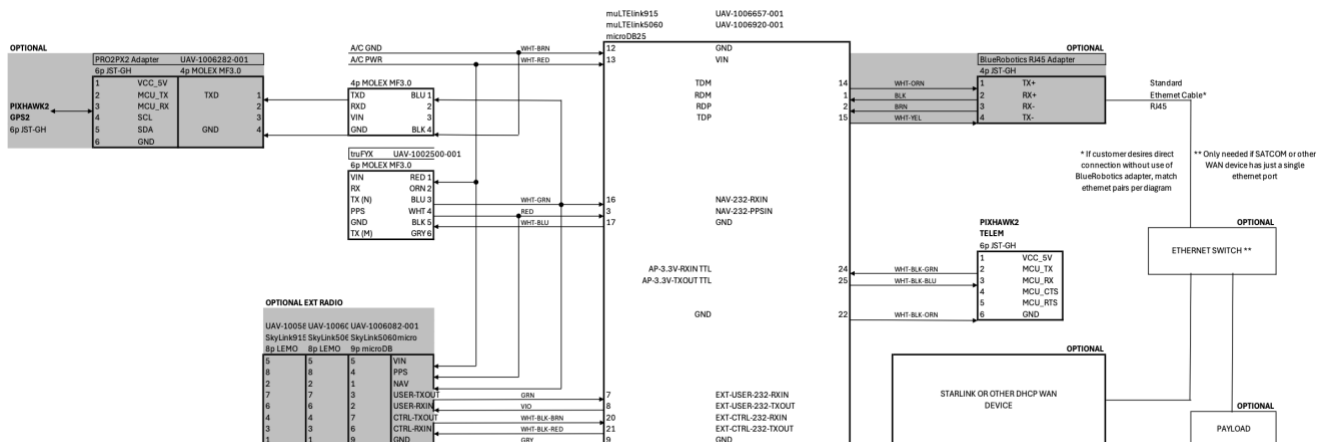

The following required statement from the Federal Communications Commission (FCC) applies to United States based entities with the exception of direct sales to the U.S. Government and units directly exported by uAvionix: This device has not been authorized as required by the rules of the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased, until authorization is obtained.

uAvionix reserves the right to alter product, services offerings, specifications, and pricing at any time without notice.

© Copyright 2022 uAvionix, all rights reserved. [www.uavionix.com](http://www.uavionix.com)